

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	350mA LED	1	-	3.8	W
Input Current(Iin)	25°C, Nominal Input@230VAC	-	55	-	mA
Output Voltage(Vout)		3	-	10.8	Vdc
Output Current(Iout)	25°C, Nominal Input	300	350	385	mA
Power Factor	Full Load	-	0.40	-	
Protection	Overload Protection		Yes		
	Short Circuit Protection		Yes		
	Over Heat Protection		Yes		
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type High Power LED 1.2W x 1~3

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

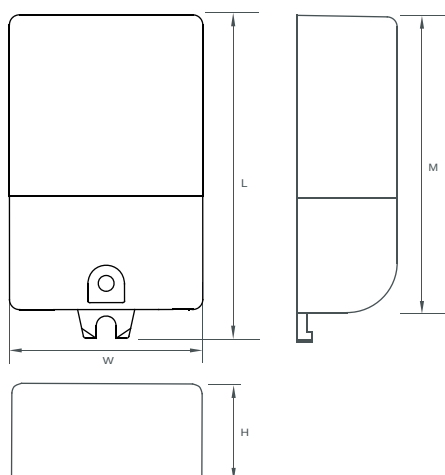

L : 72.8 mm H : 20 mm

M : mm K : mm

N : mm R : mm

W: 40 mm

Tolerance : $\geq 0 \sim 100 \geq +/0.5\text{mm}$
 $100 \geq +/1 \text{ mm}$

Terminal Block : PRI : Screw Type

SEC : Quick Connector

Slot On One Side Allowing Alignment : $M \pm 3 \text{ mm}$

Housing Material : Polycarbonate

Soldering : Lead-Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

