

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	700mA LED	6	-	13.3	W
Input Current(Iin)	25 °C,Nominal Input@230VAC	-	70	-	mA
Output Voltage(Vout)		8	-	18	Vdc
Output Current(Iout)	25 °C,Nominal Input	630	700	770	mA
Power Factor	Full Load	-	0.95	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+75	°C


Lamp Type High Power LED 3W x 2~4
5W x 2

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

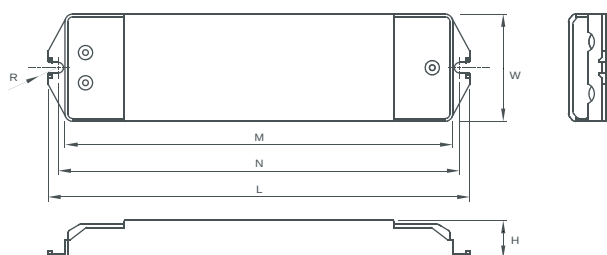

L : 178 mm H : 16 mm
 M : 164 mm K :
 N : 169.8 mm R : 2.25 mm
 W : 45.4 mm Slot On One Side Allowing Alignment : M+/-3 mm
 Tolerance : $\geq 0 \sim 100 \geq \pm 0.5$ mm
 $100 \geq \pm 1$ mm
 Terminal Block : PRI : Screw Type
 SEC : Quick Connector and Screw Type
 Housing Material : Polycarbonate
 Soldering : Lead - Free, Comply With RoHS
 Label : Surface Print

