

100V-240V AC



Approval Marks



Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		90	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	700A LED	3	-	6	W
Input Current(Iin)	25 °C,Nominal Input@230VAC	-	95	-	mA
Output Voltage(Vout)		4	-	10	Vdc
Output Current(Iout)	25 °C,Nominal Input	665	700	735	mA
Power Factor	Full Load	-	0.40	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C

Lamp Type High Power LED 3W x 1~2
5W x 1


Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Wiring Diagram

Parameter

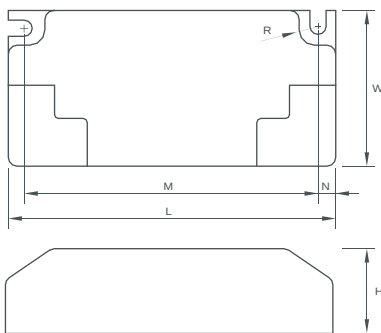

L : 85 mm H : 22 mm
M : 76.2 mm K : mm
N : 4.6 mm R : 2.1 mm
W : 40.4 mm Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance : $\geq 0 \sim 100 \geq \pm 0.5\text{mm}$
 $100 \geq \pm 1\text{ mm}$

Terminal Block : PRI : Screw Type
SEC: Screw Type

Housing Material : Polycarbonate

Soldering : Lead-Free, Comply With RoHS

Soldering : Lead Free, 60/40
Label : Surface Print

