

220-240V AC



Approval Marks



Approval NO.
NSW23742

Certified

EN 61347-1:2008
EN 61347-2-13:2006
EN 62384:2006

Electronic

Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		198	230	264	Vac
Input Frequency		47	50-60	63	Hz
Output Power(Pout)	Regular LED	0	-	60	W
Input Current(Iin)	25 °C,Nominal Input@230VAC	-	650	-	mA
Output Voltage(Vout)		22.8	24	25.2	Vdc
Output Current(Iout)	25 °C,Nominal Input	-	-	2.5	A
Power Factor	Full Load	-	0.95	-	
Protection	Overload Protection				
	Short Circuit Protection				
	Over Heat Protection				
Ambient Temp.		-20	-	+50	°C
Case Temp. (Tc)	Normal Conditions	-	-	+70	°C


Lamp Type Regular LED 0.04~0.1W

Application Space

Indoor Use
(Low Humidity, No Condensation)

Physical

Parameter

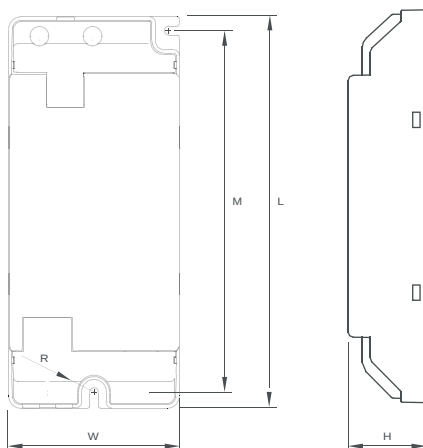

L : 173.4 mm H : 30.5 mm
M : 160.2 mm K :
W : 77 mm R : 2.1 mm

Slot On One Side Allowing Alignment : M+/-3 mm

Tolerance : $\geq 0 \sim 100 \geq +/0.5\text{mm}$

$100 \geq +/1 \text{ mm}$

Terminal Block : PRI : Push Button

SEC : Push Button

Housing Material : Polycarbonate

Soldering : Lead - Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

